

Slyde Booth S

Technical information



Other documents available for this product

Technical information for Slyde Booth M, L, XL

Ordering guidelines for Slyde Booth

User manual for Slyde Booth

Troubleshooting manual for Slyde Booth

Technical guide for Slyde Booth

Quality standard

ISO 23351-1:2020

Warranty

See Warranty statement

Ceiling

External walls

Internal front central wall

Control box

Floor



Internal acoustic walls

Internal front walls

Table

Door

Technical information

External Walls

Options

- Upholstered with fabric (1)
- Melamine (2)
- Upholstered with fabric. Rear wall with glass (3)
- Melamine. Rear wall with glass (4)

5 panels upholstered with fabric

- Welded frame is made of metal tube 1.57" x 0.78";
- Angular brackets are made of 1.57" x 1.57" metal tubes;
- Powder coated metal;
- Plastic feet with height levelling (+30 mm);
- 12 mm MFC (melamine);
- Covered with 3 mm foam;
- Upholstered with fabric.

1 solid panel from melamine

- Welded frame is made of metal tube 1.57" x 0.78";
- Angular brackets are made of 1.57" x 1.57" metal tubes;
- Powder coated metal;
- Plastic feet with height levelling (+30 mm);
- 16 mm MFC (melamine) with 1 mm ABS edging.

Walls with glass panes

- Welded frame is made of metal tube 1.57" x 0.78";
- Powder coated metal;
- Inside gasket is made of 12 mm MFC (melamine) with 1 mm ABS edging;
- Front sides and top of the metal frame are covered with 16 mm MFC (melamine) with 1 mm ABS edging;
- 8 mm TSG (tempered safety glass), clear.

1



2



3



4



Internal acoustic walls (1)

Panels upholstered with fabric

- Frame is made of 1.57"x0.78" metal tube;
- Powder coated metal;
- 10.47" MFC (melamine);
- 1.57" of acoustic foam;
- Upholstered with fabric.

Internal front walls

Options

- Upholstered with fabric (2)
- Melamine panel (3)
- If you order external walls with glass panes, you do not need to choose internal front walls


Melamine panel

- Frame is made of 1.57"x0.78" metal tube;
- Powder coated metal;
- 10.63" MFC (melamine) with 1 mm ABS edging.


Panels upholstered with fabric

- Frame is made of 1.57"x0.78" metal tube;
- Powder coated metal;
- 0.47" MFC (melamine);
- Covered with 0.12" foam;
- Upholstered with fabric.

1



2



3



Internal front central wall

Wall with control unit (1)

- Top front panel is made of 0.63" MFC (melamine) with 1 mm ABS edging;
- Bottom front panel with hinges is made of 16 mm MFC with 0.04" ABS edging;
- Sides and internal construction parts made of 0.63" MFC with 0,5 mm ABS edging;
- Ventilation and lighting dimming knobs are made of PA 2200 (Nylon);

Control box (3)

- Input (GST18i3 male): 100-240 V;
- Output (GST18i3 female): 100-240 V;
- Frequency: 50/60 Hz;
- Power cable: EU, UK, FR, CH, US – GST18i3 female, 3 m;
- Power output cable length: 0,5 m - GST18i3 male -GST18i3 female;
- Power consumption – max. 229W, standby 4,5W.

Table (2)

- Tabletop is made of 0.63" MFC (melamine) with 1 mm ABS edging;
- Box for wires (135x150x100 mm) underneath the table top is made of 0.04" powder coated metal sheet;
- Bracket made of 1.57"x0.78" metal tube;
- Powder coated metal;
- Mounted 1 AC power socket (100-240 V) with or without integrated USB fast charger (USB Type A+C, max 5A);
- Load capacity – 25 kg.

1



2



3



Ceiling (1)

Composition

- Double layered ceilings are made of 0.47" top and 0.63" bottom MFC (melamine) panels with 0.04" ABS edging;
- Frame is made of 1.97"x0.79" metal tube;
- PIR sensor mounted in to central ceiling segment;
- Fan grills are made of 0.04" metal sheet;
- Powder coated metal;
- Air supply duct inside glued with acoustic foam;
- Ø2.36" cable grommet for optional power supply from ceiling.

Lighting

- 3x LED modules (8,92W) colour temperature approx. 3000 K dimmable;
- 3x LED housing (asymmetrical) made of aluminium;
- Replacement for LED modules can only be purchased from the manufacturer.


Ventilation

- 2x air supply fans are located in the ceilings;
- 2x air exhaust slots are located in central segment of the ceilings for natural ventilation;
- Maximum airflow approx. 200 m³/h.

Doors (2)

- Left-handed or right-handed option;
- Metal door frame is made of 40x40 mm tube and 40x8 mm steel rod;
- Powder coated metal;
- Aluminium profiles with PVC sealing fixed to internal sides and top and bottom of door frame;
- Top of the metal frame is covered with 0.63" MFC (melamine) with 0.04" ABS edging;
- 0.31" TSG (tempered safety glass), clear;
- Clear width of a door opening - 39.52".

1



2



Floors (optional) (1)

- Metal floor frame is made of 40x40 mm and 1.57"x0.78" tube;
- Powder coated metal;
- Floor panels are made of 0.98" MFC with 0.02" ABS edging;
- Floor carpet thickness 0.12", made of PA6 (40%) and PP (60%);
- Skirting boards made of 0.63" MFC with 0.04" ABS edging;
- Plastic feet with height levelling (+1.18").
- Note that the floor adds approximately 2.75" to the overall height.

Carpet (optional) (2)

- Carpet thickness 0.25", made of 100% polyamide, antistatic;
- It is highly recommended to use the carpet when placing the SILENT ROOM on the hard flooring.
- If you are planning to place the SILENT ROOM on your carpet, you do not need to order the additional carpet.
- Uneven floor can be the cause of sound insulation problems.

1




2



Range

Fabric + fabric back version


Product weight: 672 lbs

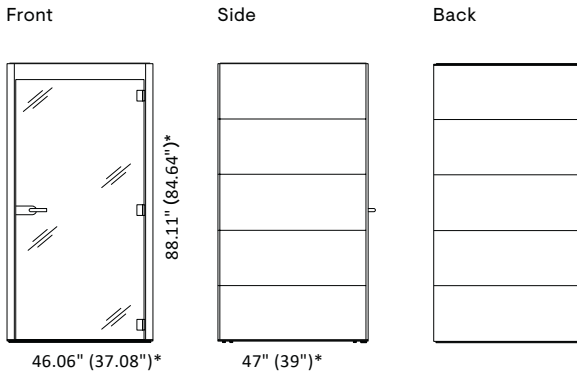

Total height with floor: 90.78"

Melamine + melamine back version


Product weight: 694 lbs

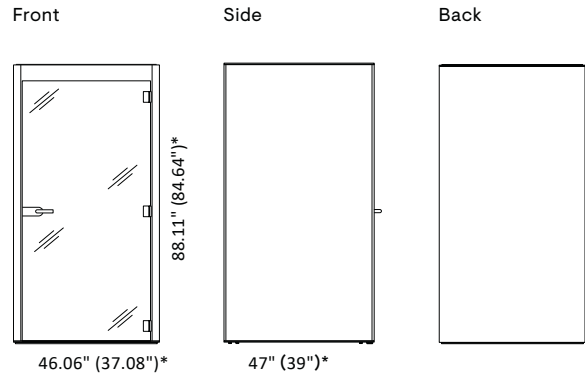

Total height with floor: 90.78"

Fabric + glass back version


Product weight: 666lbs

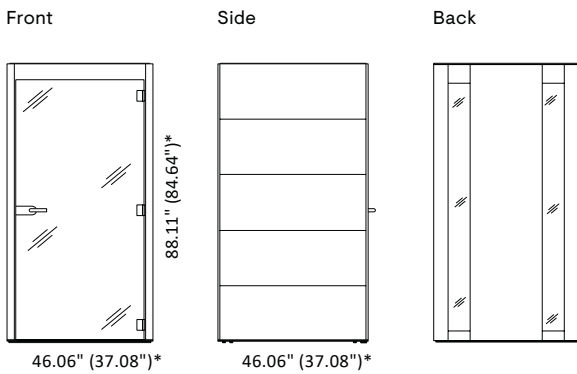

Total height with floor: 90.78"

Melamine + glass back version

Product weight: 679lbs

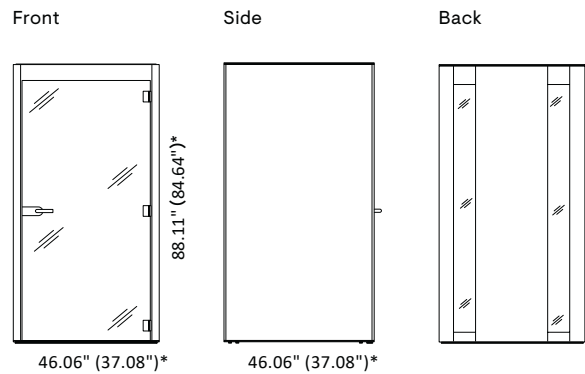

Total height with floor: 90.78"

* External dimension (internal dimension)

! Recommended height of the space for SILENT ROOM installation – $\geq 94.48''$ (without floor).
 Recommended height of the space for SILENT ROOM installation – $\geq 97.24''$ (with floor).


Additional information

Shipping dimensions


WxDxH:

88.58"x46.45"x27.36"

(Accessories not included)

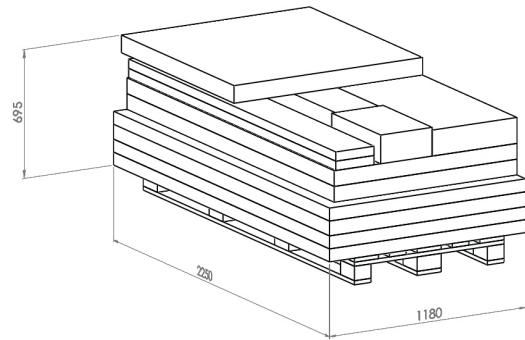

Automatic operation

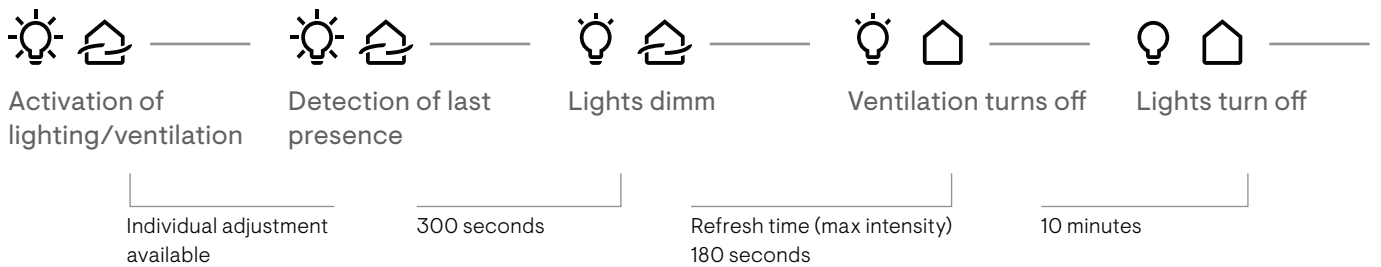

Information about available accessories for this range can be found in our product pricelists.

Slyde Booth (M)

Technical information



Other documents available for this product

Technical information for Slyde Booth S, L, XL
Ordering guidelines for Slyde Booth
User manual for Slyde Booth
Troubleshooting manual for Slyde Booth
Technical guide for Slyde Booth

Warranty

See Warranty statement



Technical information

External Walls

Options

- Upholstered with fabric (1)
- Melamine (2)
- Upholstered with fabric. Rear wall with glass (3)
- Melamine. Rear wall with glass (4)

5 panels upholstered with fabric

- Welded frame is made of metal tube 1.57" x 0.78";
- Angular brackets are made of 1.57" x 1.57" metal tubes;
- Powder coated metal;
- Plastic feet with height levelling (+1.18");
- 0.47" MFC (melamine);
- Covered with 0.12" foam;
- Upholstered with fabric.


1 solid panel from melamine

- Welded frame is made of metal tube 1.57" x 0.78";
- Angular brackets are made of 1.57" x 1.57" metal tubes;
- Powder coated metal;
- Plastic feet with height levelling (+1.18");
- 0.63" MFC (melamine) with 0.04" ABS edging.


Walls with glass panes

- Welded frame is made of metal tube 1.57" x 0.78";
- Powder coated metal;
- Inside gasket is made of 0.47" MFC (melamine) with 1 mm ABS edging;
- Front sides and top of the metal frame are covered with 0.63" MFC (melamine) with 0.04" ABS edging;
- 0.31" TSG (tempered safety glass), clear.


1




2



3



4



Internal acoustic walls (1)

Panels upholstered with fabric

- Frame is made of 1.57" x 0.78" metal tube;
- Powder coated metal;
- 0.47" MFC (melamine);
- 1.57" of acoustic foam;
- Upholstered with fabric.

Internal front walls

Options

- Upholstered with fabric (2)
- Melamine panel (3)
- If you order external walls with glass panes, you do not need to choose internal front walls

Melamine panel

- Frame is made of 1.57" x 0.78" metal tube;
- Powder coated metal;
- 0.63" MFC (melamine) with 0.04" ABS edging.


Panels upholstered with fabric

- Frame is made of 1.57" x 0.78" metal tube;
- Powder coated metal;
- 0.47" MFC (melamine);
- Covered with 0.12" foam;
- Upholstered with fabric.

1



2



3



Internal front central wall

Options

- Internal front central wall with electronic control system (1)
- Internal front central wall with low table, VESA mount and electronic control system (2)
- Internal front central wall with high table, VESA mount and electronic control system (3)

Wall with control unit

- Top front panel is made of 0.63" MFC with 0.04" ABS edging;
- Bottom front panel with hinges is made of 0.63" MFC with 0.04" ABS edging;
- Sides and internal construction parts are made of 0.63" MFC with 0.02" ABS edging;
- Ventilation and lighting dimming knobs are made of PA 2200 (Nylon);
- Cable guides are located on both sides of the wall (only for units without tables).

Table

- 28.35" or 41.33" tabletop height option;
- Tabletop is made of 0.63" MFC (melamine) with 0.04" ABS edging;
- Box for wires (5.31" x 5.91" x 3.94") underneath the table top is made of 1 mm powder coated metal sheet;
- Table frame is made of 1.57" x 0.78" metal tube;
- Top of the leg is made of 2.76" x 0.79" metal tube;
- Leg base is made of 1.57" x 1.57" metal tube;
- Powder coated metal;
- Feet with height levelling (+0.39").


Control box (3)

- Input (GST18i3 male): 100-240 V;
- Output (GST18i3 female): 100-240 V;
- Frequency: 50/60 Hz;
- Power cable: EU, UK, FR, CH, US – GST18i3 female, 3 m;
- Power output cable length: 0,5 m - GST18i3 male - GST18i3 female;
- Power consumption – max. 229W, standby 4,5W.

Screen bracket

- Screen bracket base is made from 2.76" x 0.79" powder coated metal tube;
- VESA plate (4.72" x 4.72") is made of 0.08" metal sheet;
- VESA standards – 2.95" x 2.95", 3.93" x 3.93" mm and recommended weight is up to 10 kg;
- Recommended screen size is up to 27";
- VESA plate can be fixed to the holder in 3 different heights;
- Bolts for flat screen assembly are not included.


1



2



3



4



Ceiling (1)

Composition

- Double layered ceilings are made of 0.47" top and 0.63" bottom MFC (melamine) panels with 0.04" ABS edging;
- Frame is made of 1.97" x 0.78" metal tube;
- PIR sensor mounted in to central ceiling segment;
- Fan grills are made of 0.04" metal sheet;
- Powder coated metal;
- Air supply duct inside glued with acoustic foam;
- $\varnothing 2.36$ " cable grommet for optional power supply from ceiling.

Glass facade with doors (2)

Doors

- Left-handed or right-handed option;
- Metal door frame is made of 1.57" x 1.57" tube and 1.57"x 0.31" steel rod;
- Powder coated metal;
- Aluminium profiles with PVC sealing fixed to internal sides and top and bottom of door frame;
- Top of the metal frame is covered with 16 mm MFC (melamine) with 0.04" ABS edging;
- 0.31" TSG (tempered safety glass), clear;
- Clear width of a door opening - 29.53".

Lighting

- 3x LED modules (8,92W) colour temperature approx. 3000 K dimmable;
- 3x LED housing (asymmetrical) made of aluminium;
- Replacement for LED modules can only be purchased from the manufacturer.


Ventilation

- 4x air supply fans are located in central segment of the ceilings;
- 4x air exhaust slots are located in central segment of the ceilings for natural ventilation;
- Maximum airflow approx. 400 m³/h.

Glass facade

- Metal door frame is made of 1.57" x 1.57" tube;
- Powder coated metal;
- Inside gasket is made of 0.47" MFC (melamine) with 0.04" ABS edging;
- Front sides and top of the metal frame are covered with 0.63" MFC (melamine) with 1 mm ABS edging;
- 0.31" TSG (tempered safety glass), clear.

1



2



Floors (optional) (1)

- Metal floor frame is made of 1.57" x 1.57" and 1.57" x 0.78" tube;
- Powder coated metal;
- Floor panels are made of 0.98" MFC with 0.02' ABS edging;
- Floor carpet thickness 0.12", made of PA6 (40%) and PP (60%);
- Skirting boards made of 0.63" MFC with 1 mm ABS edging;
- Plastic feet with height levelling (+1.18").
- Note that the floor adds approximately 2.76" to the overall height.

Carpet (optional) (2)

- Carpet thickness 0.26", made of 100% polyamide, antistatic;
- It is highly recommended to use the carpet when placing the SILENT ROOM on the hard flooring.
- If you are planning to place the SILENT ROOM on your carpet, you do not need to order the additional carpet.
- Uneven floor can be the cause of sound insulation problems.

1



2



Electrical specification

Power socket (ARU704)

- 1 AC power socket 100-240 V;
- Integrated USB fast charger (USB Type A+C, max 5A);
- 1 cable guide for multimedia cable;
- Mounting in $\varnothing 3.15$ " cut-out;
- Dimensions: $\varnothing 3.54$ "x 2.60";
- Power socket standards: EU, FR, UK, CH, US;
- Cable length: 31.50"

Power socket (ARU703)

- 1 AC power socket 100-240 V;
- Dimensions: 90x66 mm;
- Mounting in $\varnothing 3.15$ " cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Cable length: 31.50" .

Power socket block set for media (ZZZ336)

- 3 AC power sockets 100-240 V;
- Dimensions: 10.24" x 2.36" x 1.77";
- Adaptor block GST18i3 T-type - 1x male, 2x female;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 0.02" - GST18i3 male -GST18i3 female.

ARU704



ARU703



ZZZ336



Power unit for media wall (ZZZ340)

- 3 AC power sockets 100-240 V;
- Dimensions: 10.23"x2.36"x1.77";
- Metal frame 12.48"x4.68"x1.57", made from 0.08" metal sheet;
- Powder coated metal;
- Mounting in 11.81"x4.33" cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 1 m - GST18i3 male - GST18i3 female.

Power unit for media wall (ZZZ341)

- 2 AC power sockets 100-240 V;
- 1 LAN outlet (CAT6 RJ45) with 2 m flylead;
- Dimensions: 10.23"x2.36"x1.77";
- Metal frame 12.48"x4.68"x1.57", made from 2 mm metal sheet;
- Powder coated metal;
- Mounting in 11.81"x4.33" cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 1 m - GST18i3 male - GST18i3 female.

Power unit for media wall (ZZZ342)

- 2 AC power sockets 100-240 V;
- 1 Integrated USB fast charger (Type A+C, max 5A);
- Dimensions: 10.23"x2.36"x1.77";
- Metal frame 12.48"x4.68"x1.57", made from 0.08" metal sheet;
- Powder coated metal;
- Mounting in 11.81"x4.33" cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 1 m - GST18i3 male - GST18i3 female

Power unit for media wall (ZZZ343)

- 1 AC power sockets 100-240 V;
- 1 Integrated USB fast charger (Type A+C, max 5A);
- 1 LAN outlet (CAT6 RJ45) with 2 m flylead;
- Dimensions: 10.23"x2.36"x1.77";
- Metal frame 12.48"x4.68"x1.57", made from 2 mm metal sheet;
- Powder coated metal;
- Mounting in 11.81"x4.33" cut-out;
- Power socket standards: EU, FR, UK, CH, US;
- Extension cable length: 1 m - GST18i3 male - GST18i3 female.

ZZZ340



ZZZ341



ZZZ342




ZZZ343



Range

Fabric + fabric back version


Product weight: 458 kg

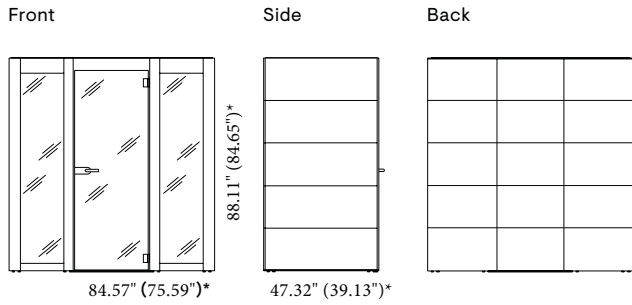

Total height with floor: 90.79"

Melamine + melamine back version


Product weight: 472 kg

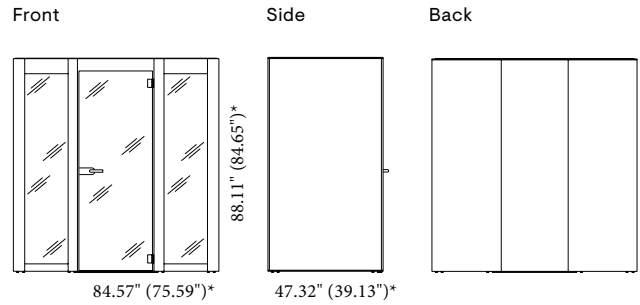

Total height with floor: 90.79"

Fabric + glass back version


Product weight: 448 kg

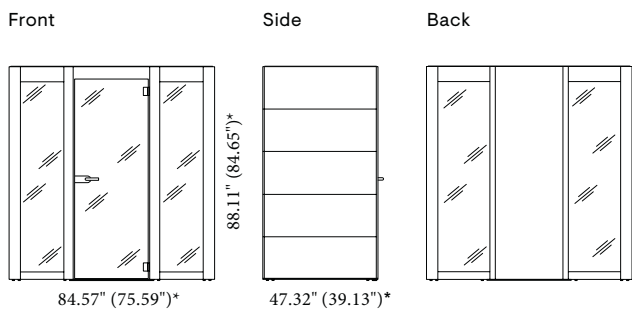

Total height with floor: 90.79"

Melamine + glass back version

Product weight: 454 kg

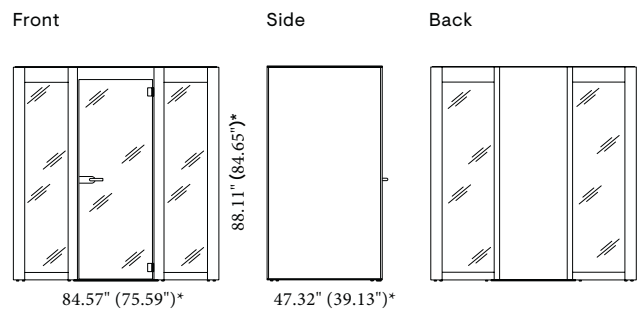

Total height with floor: 90.79"

* External dimension (internal dimension)

! Recommended height of the space for SILENT ROOM installation – ≥ 94.49" (without floor).
 Recommended height of the space for SILENT ROOM installation – ≥ 97.24" (with floor).


Additional information

Shipping dimensions


WxDxH: 88.58"x 46.46" x 42.52"

(Accessories and poufs are not included)

Height of shipping dimensions will be slightly smaller for SILENT ROOM with external rear wall with glass panes.

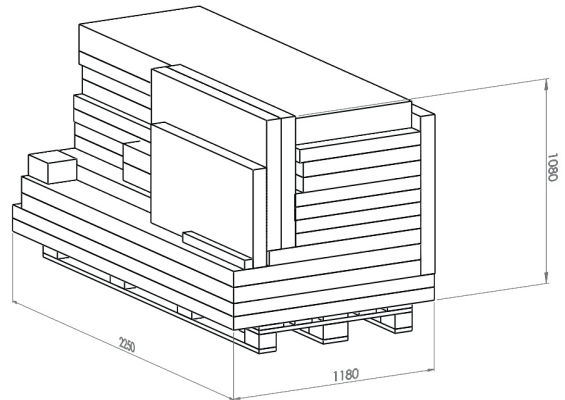

Automatic operation

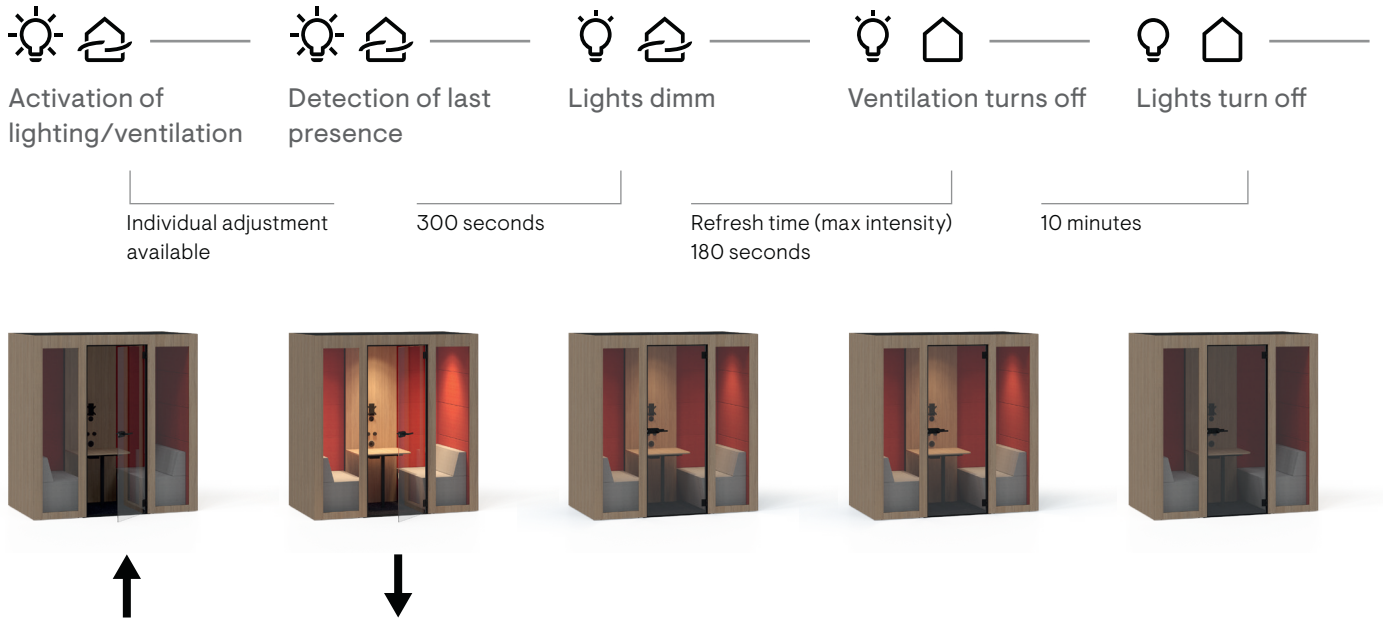

Information about available accessories for this range can be found in our product pricelists.